





The Brief

We were asked to tarmac a car park for a building that was being transformed into offices, the customer wanted a cost effective and time efficient way to transform the car park with a new lease a life and opted for tarmac and for extra kerb appeal asked to install resin footpaths.

To install a new tarmac driveway with full groundworks, we'd install 100-150mm quality granular hardcore base to make sure the strength was there to support the number of vehicle traffic that will be using the car park, the next stage would be to install a 50-80mm binder course before finally installing a 20-40mm surface wearing course.

As in this case the resin being installed was for footfall traffic only therefore a type 3 hardcore would be installed followed by a tarmac binder base of 50-80mm before finally installing a 15mm-18mm resin bound surface.

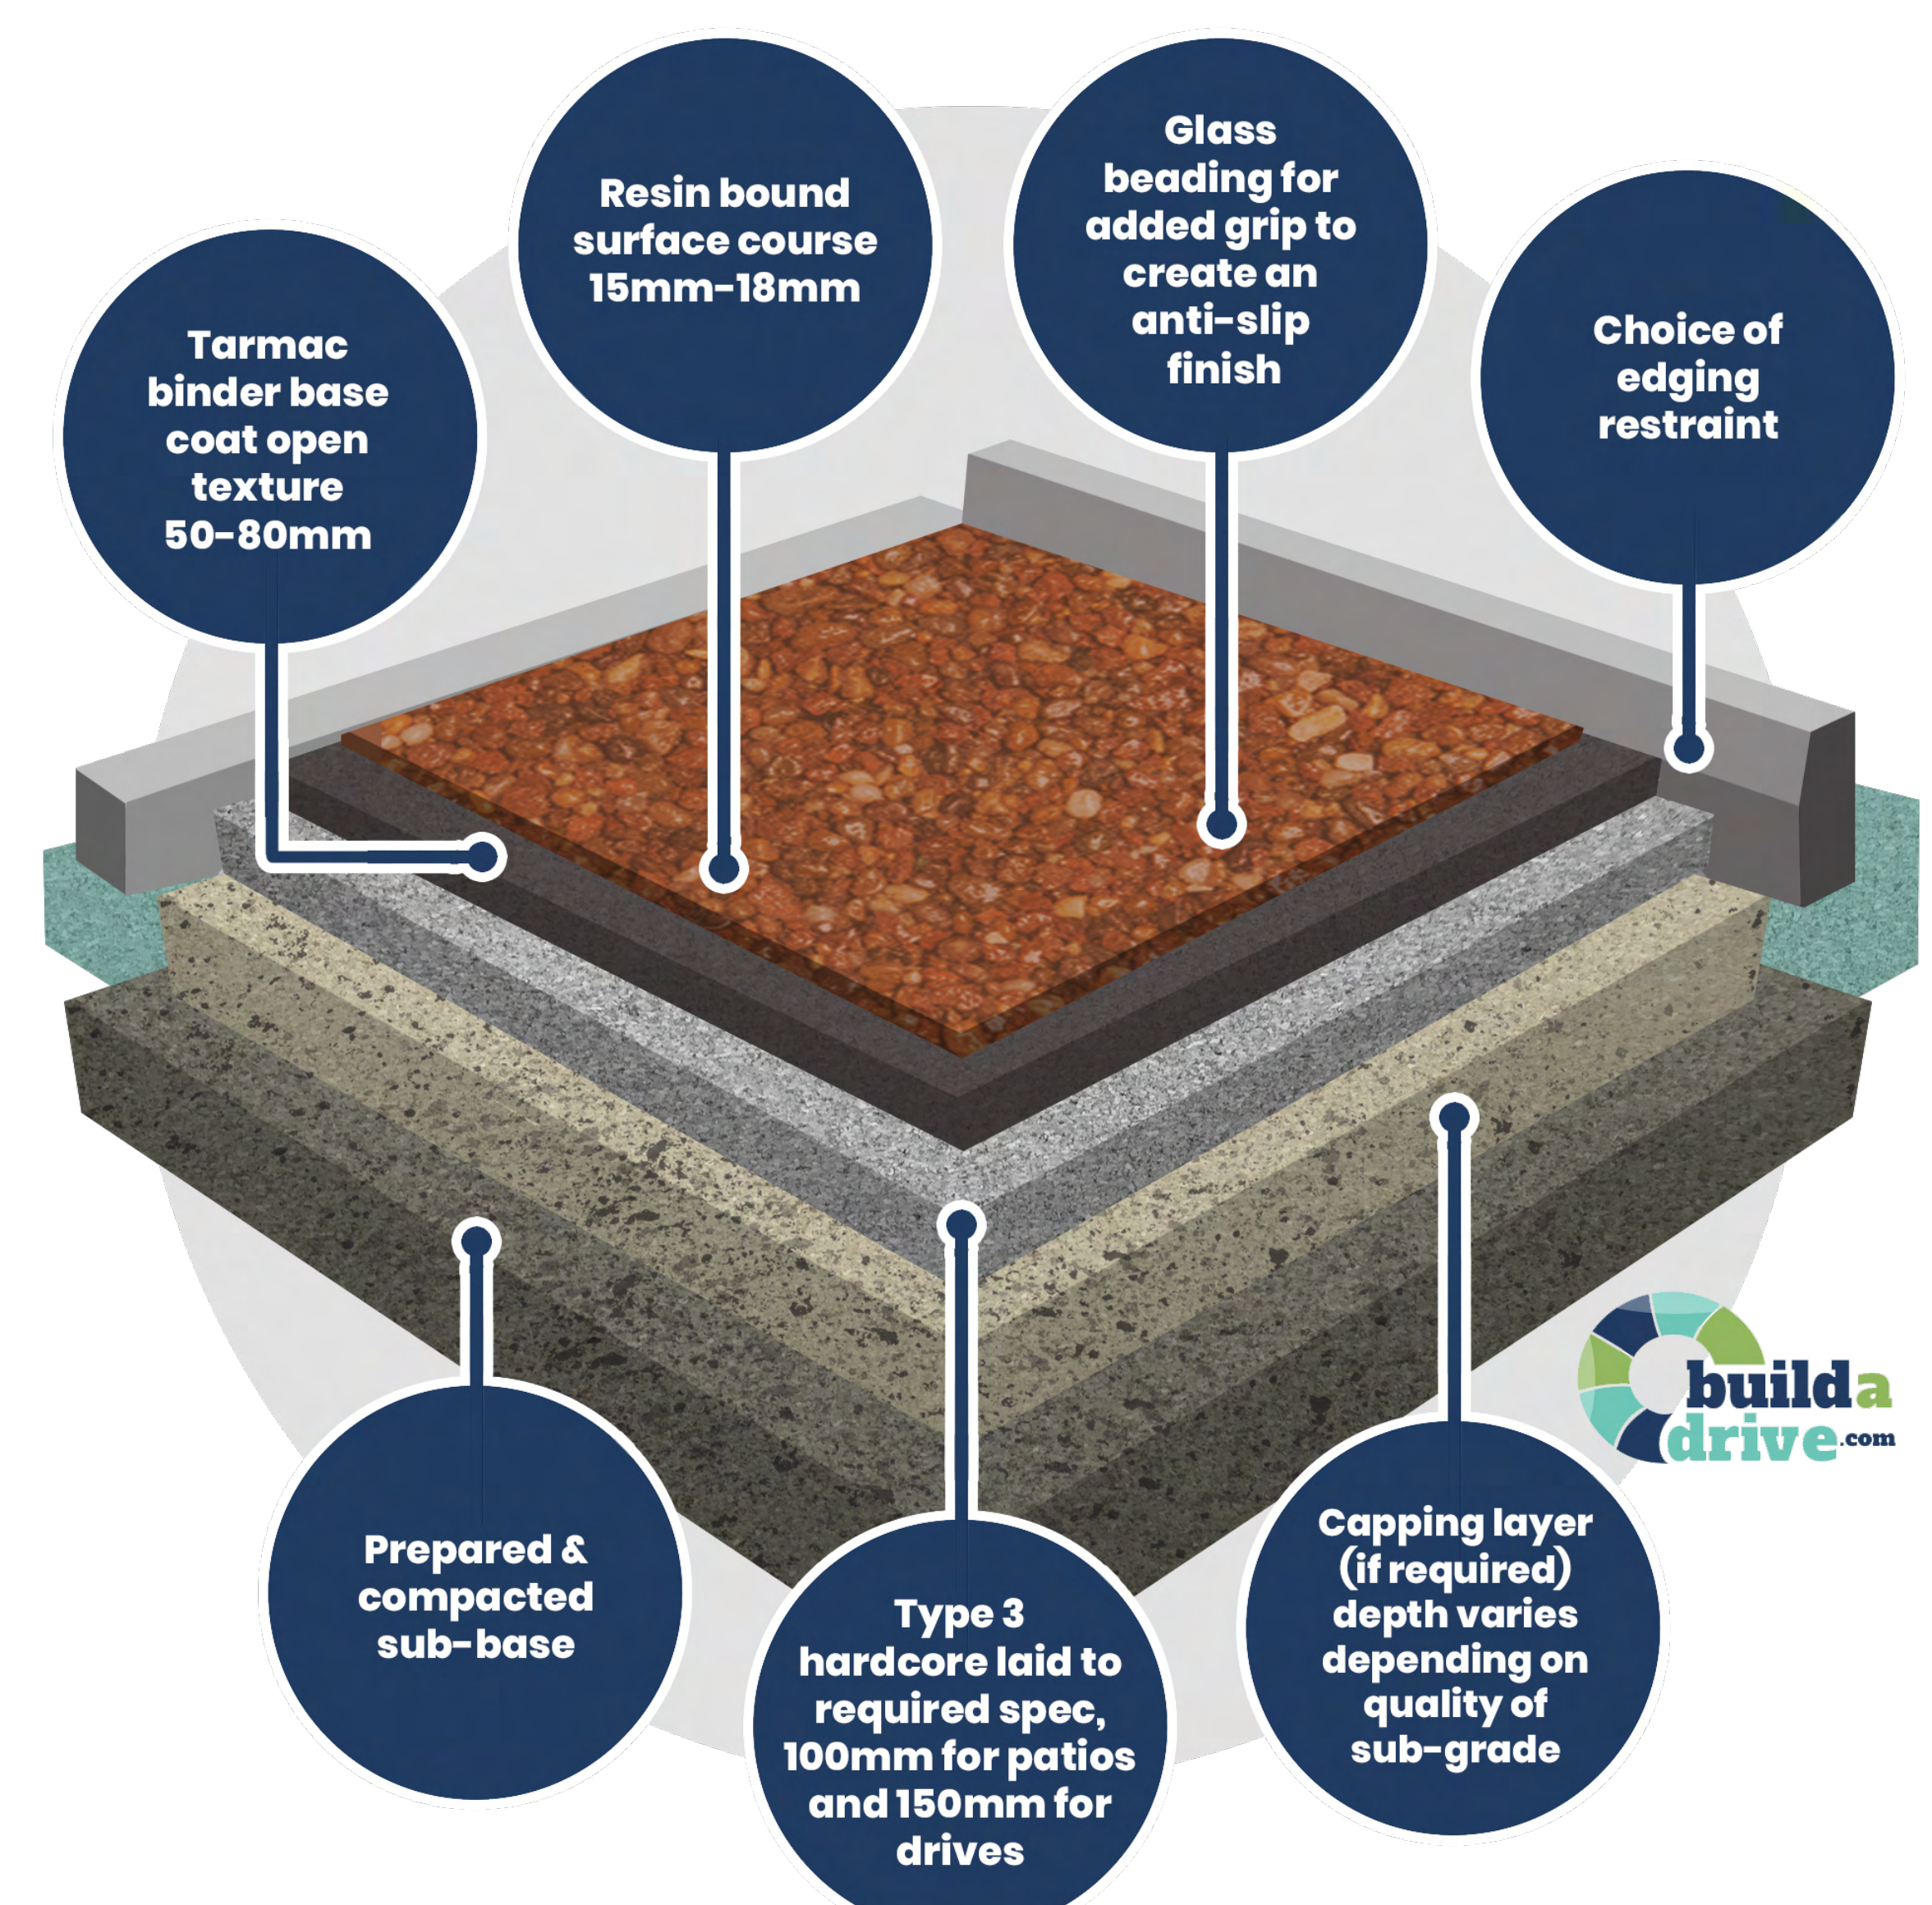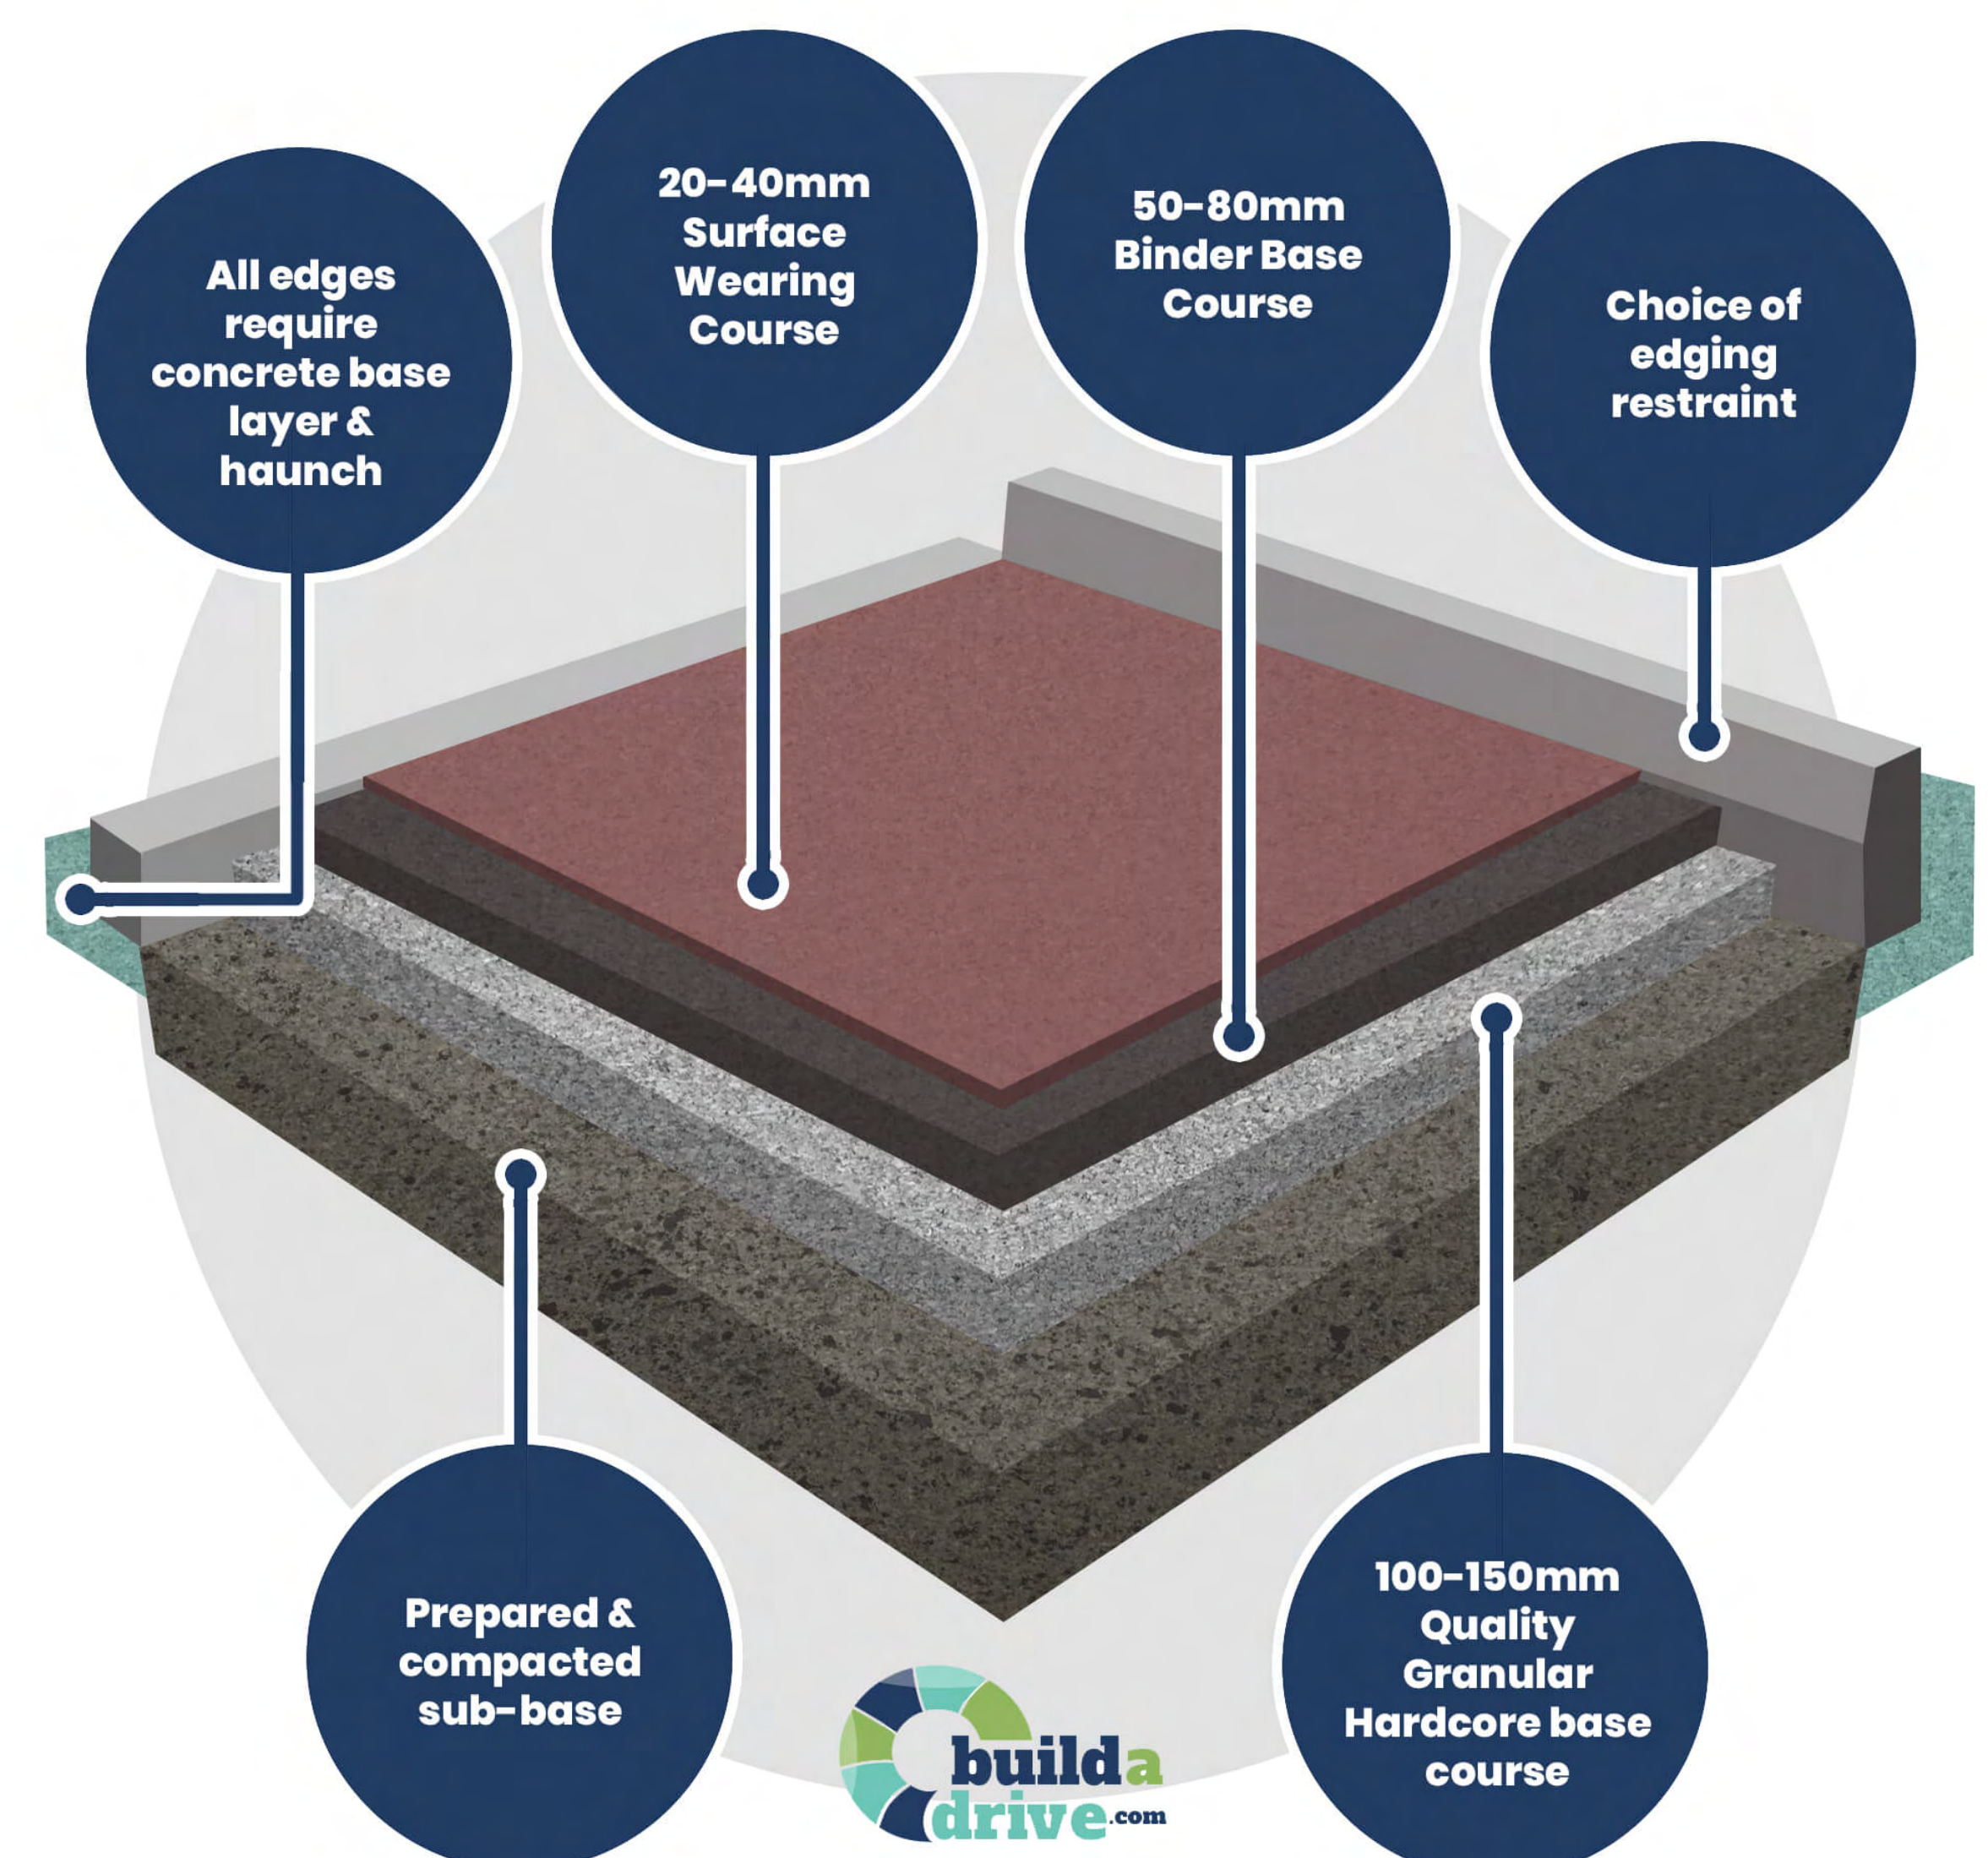



5 Step Process

1. Firstly we'd provide you with a fully itemised quote based from an on-site survey, discussing what you'd like to achieve and offer some advice and suggestions.
2. A second more in depth visit will be the next steps this is where photos and videos will be taken and provided to our in-house teams to show is required in full detail, this is also where all H&S is covered.
3. Groundworks – Excavation of the car park area – Fully prepared and ready for the next stages.
4. A member of our power clean team will clean down the tarmac under coat ready for the final layer of tarmac.
5. The final stage is transforming your car park with the final stages of tarmac.



We've built up some amazing reviews all across Google, TrustPilot and other social media platforms based on the level of service we provide and the extra attention to detail we provide all our customers.

All our teams are in-house, professional, hold industry approved accreditations such as CHAS, CSCS and a member of The guild of master craftsmen. You're in safe, reliable hands.

Book a free, no obligation site survey by calling 0113 512 0398

